



MODEL 65C+ GAS FRYER



STANDARD FRYER FEATURES & ACCESSORIES

- Tank - Stainless steel
- Cabinet - stainless front, door
- Galvanized sides and back
- Millivolt Thermostat (T-Stat)
- Thermo-Safety pilot with built in regulator.
- High Temperature safety limit switch
- 3/4 NPT rear gas connection
- 1 1/4" (3.2 cm) Full port drain valve for fast draining
- Separate Manual gas shutoffs, for front servicing
- Integrated flue deflector
- 6" (15.2cm) adjustable legs, easier access to clean
- Tube rack, allows crumbs & debris into cool zone
- Removable basket hanger, requires no tools
- Drain Line Clean out rod
- Drain extension
- Fryer cleaner sample packet
- Choice of basket options :
 - 2-Twin Baskets
 - 1-Full Basket

Project _____

Item No. _____

Quantity _____

APPLICATION

For High Volume Gas single standalone frying specify Pitco Gas Model 65C+ tube fryer.

MODELS AVAILABLE

- 65C+ (65-80 lbs, 18 x 18" fry area, (150Kbtu/hr) (44kW) (158.4MJ/hr) Natural/Propane
- 65C+ CE/AU models (65-80 lbs, 18 x 18" fry area, (136.5Kbtu/hr), (40kW / 144MJ/hr) Natural/Propane

CONSTRUCTION

- Welded tank with a super smooth machine peened finish ensures easy cleaning.
- Long lasting, high temperature alloy stainless steel heat baffles are mounted in the heat exchanger tubes to provide maximum heating and combustion efficiency.
- Standing pilot light design provides a ready flame when heat is required.

CONTROLS

- Integrated gas control valve acts as a manual and pilot valve, automatic pilot valve, gas filter, pressure regulator and automatic main valve.
- Gas control valve prevents gas flow to the main burner until pilot is established and shuts off all gas flow automatically if the pilot flame goes out.
- Temperature limit automatically shuts off all gas flow if the fryer temperature exceeds 450°F (232°C) ±15°F (±10°C) / 410°F (210°C) for International units.

OPTIONS & ACCESSORIES (AT ADDITIONAL COST)

- Stainless Steel back
- 6" (15.2cm) adjustable rear and front locking casters
- Flexible gas hose with disconnect and restraining cable
- Tank cover
- 3-Triple Baskets

MODEL 65C+ GAS FRYER




Pitco Frialator, Inc • P.O. Box 501, Concord, NH 03302-0501 • 553 Route 3A, Bow, NH 03304

603-225-6684 • FAX: 603-225-8497 • www.pitco.com

L10-327 Rev 5 05/19

Printed in the USA

MODEL 65C+ GAS FRYER

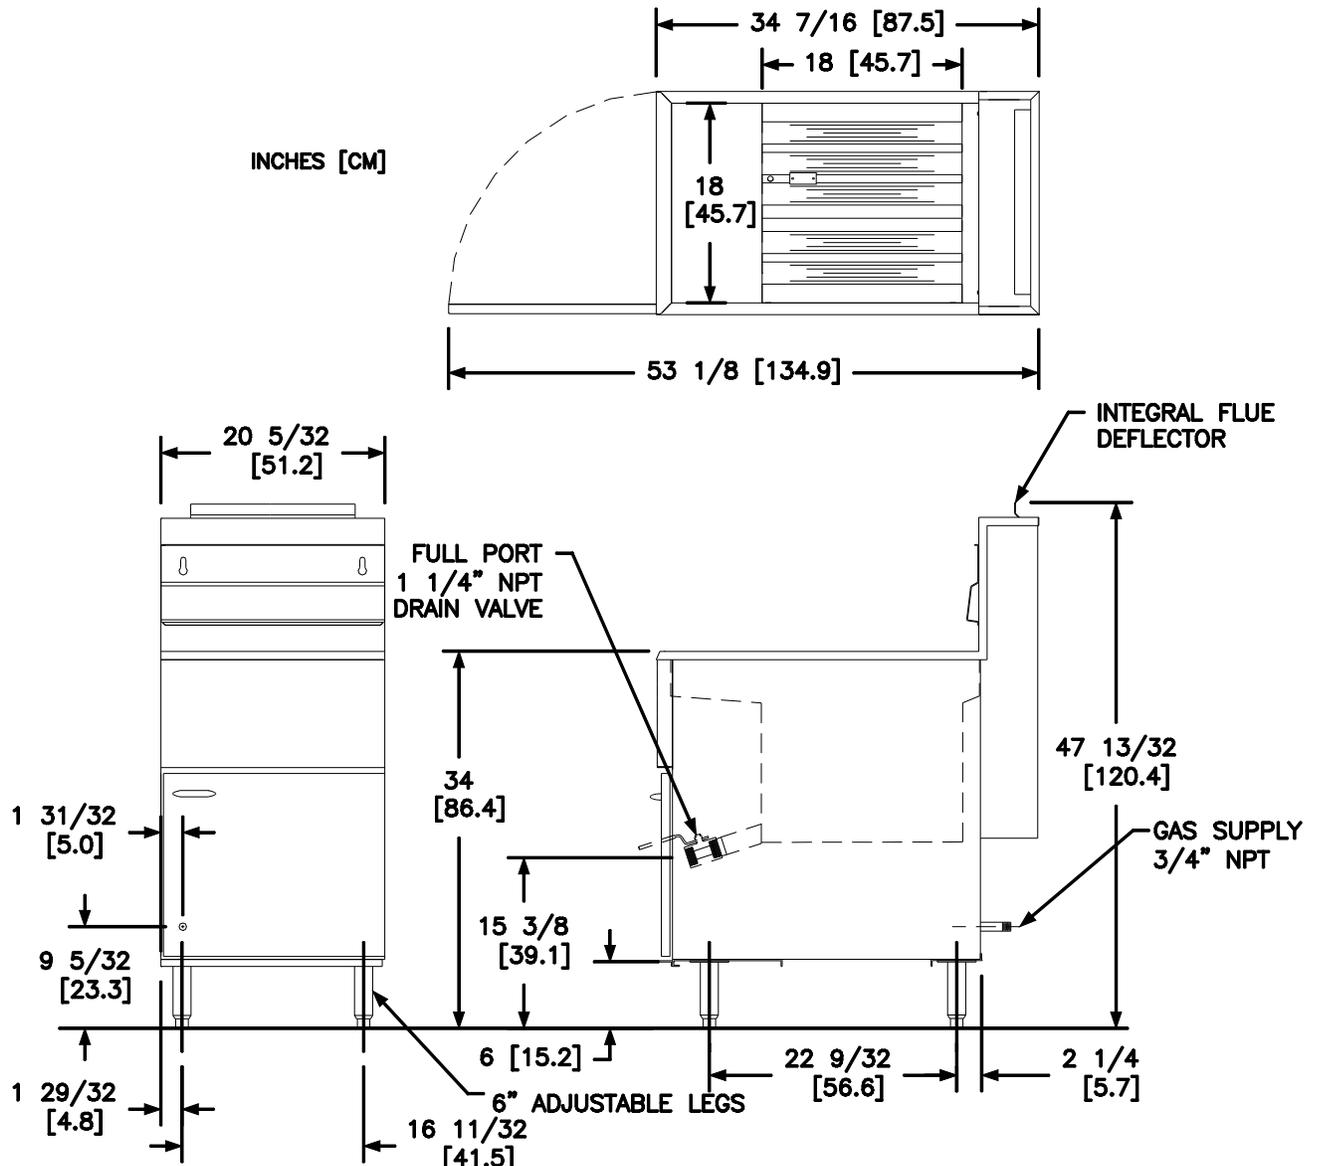

INDIVIDUAL FRYER SPECIFICATIONS

| Model | Frying Area | Cook Depth | Oil Capacity |
|-------|-----------------------------|-----------------------------|----------------------------|
| 65C+ | 18 x 18 in (45.7 x 45.7 cm) | 3-1/4 - 5 in (8.3 -12.7 cm) | 65-80 Lbs (29.4 - 36.3 kg) |

FRYER SHIPPING INFORMATION (Approximate)

| Model | Shipping Weight | Shipping Crate Size H x W x L | Shipping Cube |
|-------|------------------|--|---|
| 65C+ | 226 Lbs (103 kg) | 45 x 23 x 38 in (114.3 x 58.4 x 96.5 cm) | 22.8 ft ³ . (0.6m ³) |

INSTALLATION INFORMATION

GAS SYSTEM REQUIREMENTS

| Gas Type | Store Supply Pressure * | Burner Manifold Pressure | * Check plumbing / gas codes for proper gas supply line sizing to sustain burner pressure when all gas appliances are full on. |
|-----------|--|----------------------------|--|
| Natural | 7 - 10" w.c.(17.4 mbars/ 1.7 kPa) | 4" w.c. (10 mbars / 1 kPa) | |
| Propane | 11 - 13" w.c.(27.4 mbars/ 2.7 kPa) | 10" w.c. (25mbars/2.5 kPa) | |
| Gas Input | Dom 150,000 BTU's/Hour (44 kW) (158.4MJ/hr) CE/AU 136,500 BTU's/Hour (40 kW) (144MJ/hr) | Production Capacity | 79.3 lbs Fries per Hr |

CLEARANCES (Do Not Curb Mount)

| Front min. | Floor min. | Combustible material | | Non-Combustible material | | Fryer Flue Area |
|------------------|------------------|----------------------|-------------|--------------------------|-----------|--|
| 30" (76.2 cm) | 6" (15.25 cm) | Sides min. | Rear min. | Sides min. | Rear min. | Do not block / restrict flue gases from flowing into hood or install vent hood drains over the flue. |
| | | 6" (15.2cm) | 6" (15.2cm) | 0" | 0" | |

SHORT FORM SPECIFICATION

Provide Pitco Gas Model tube fired high volume gas floor fryer. Fryer shall be 65-80 lbs oil capacity, 150,000 Kbtu/hr, 18" by 18" fry area, stainless steel peened tank, stainless front, door, sides. Blower Free atmospheric burner system, with millivolt thermostat and thermo-safety pilot, separate gas shut off, 3/4" npt rear gas connect, recessed cabinet back, 1-1/4" Full port drain. Provide options and accessories as follows:



Pitco Frialator, Inc • P.O. Box 501, Concord, NH 03302-0501 • 553 Route 3A, Bow, NH 03304

603-225-6684 • FAX: 603-225-8497 • www.pitco.com L10-327 Rev 5 05/19 Printed in the USA

We reserve the right to change specifications without notice and without incurring any obligation for equipment previously or subsequently sold.