



**Model AW-SG14R-3
Gas Open Fryer with Filtration**



Model AW-SG14R-3 Gas Open Fryer with Filtration



APPLICATION

The AW-SG14R-3 fryer design offers higher production with increased efficiency and a space saving under the fryer filter system which is ideal for cooking fries, onion rings, chicken filets, chicken strips and other freezer to fryer products.

STANDARD FRYER FEATURES

- Fry pot constructed of stainless steel
- SOLSTICE™ Burner Technology
- 1 1/4" (3.2 cm) Full port drain valve
- Cabinet- stainless steel sides, front, splash back
- I-12 Intellifry menu cooking computer
- Matchless pilot ignition system with flame loss safety shut off, dedicated fryer gas shut-off valves
- High temperature limit switch
- Drain valve interlock
- Heavy duty 3/16" (.48 cm) door hinges
- 9" (22.9 cm) swivel adjustable casters, front locking
- Single gas connection – 1 1/4" (3.2 cm) NPT

ACCESSORY ITEMS SHIPPED WITH UNIT

- 1 - Fry pot drain clean out rod
- 1 - Fry pot cleaning brush
- 1 - Fry pot crumb scoop
- 1 - Filter shovel scoop
- 1 - YUM 14" x 22" (35.6 x 55.9 cm) filter paper envelope starter pack
- 1 - 48"x 1 1/4" (122 x 3.2 cm) NPT flexible gas hose with disconnect with 1 1/4" (3.2 cm) close nipple
- 3 - Tube racks
- 3 - Removable basket hangers
- 6 - Twin size fry baskets

SHORT FORM DESCRIPTION

Fryer, Gas Open Fryer with Filtration AW-SG14R-3 (Gas type, voltage), Line up (L/R) 14R,filter,14R,14R with I-12 Intellifry computer, matchless ignition, drain valve interlock, SS sides & front, casters. Accessories includes: (1) clean out rod, (1) brush, (1) crumb scoop, (1) filter shovel scoop, (1) YUM filter envelope starter pack, (1) 48" x 1 1/4" (122 x 3.2 cm) flexible gas hose, (3) tube racks, (3) removable basket hangers, (6) twin baskets. Startup performance check by a qualified service representative.

STANDARD FILTER FEATURES

- Filter pump thermally and overload protected
- Rear oil return for bottom cleaning.
- Extra Large 3" (7.6 cm) curved drain spout virtually eliminates splashing and swivels for oil disposal.
- Filter pan is stainless steel with rear wheels for easy movement during cleaning.
- Connection to fryer is self aligning for hands free operation. Easy two step filtering.
- Filter pan lid. Self storing, out of the way.



Pitco Frialator, Inc • P.O. Box 501, Concord, NH 03302-0501 • 509 Route 3A, Bow, NH 03304


603-225-6684 • FAX: 603-225-8497 • www.pitco.com

L10-206 Rev 3 03/06

Printed in the USA

Model AW-SG14R-3 Gas Open Fryer with Filtration

Model AW-SG14R-3 Gas Open Fryer with Filtration

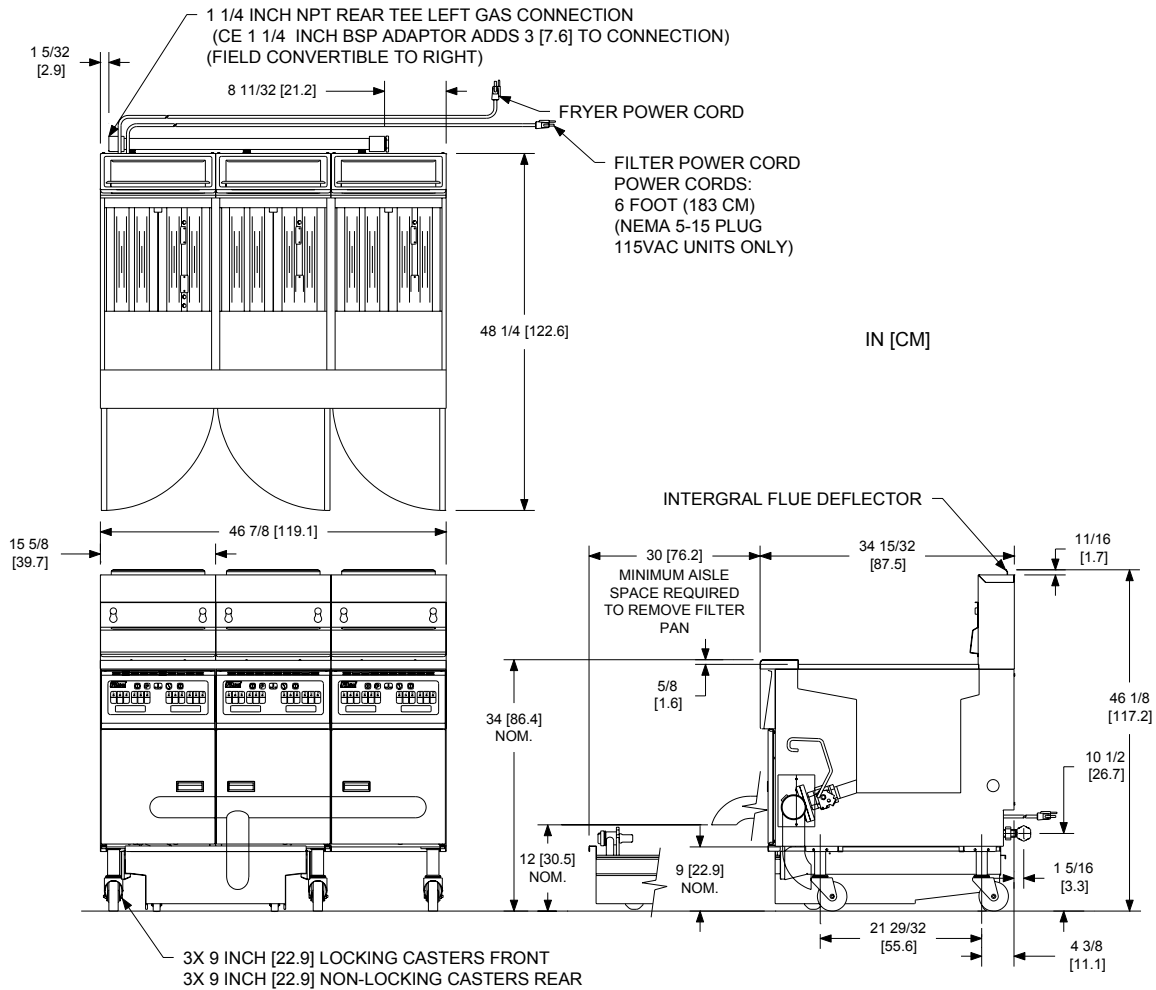

INDIVIDUAL FRYER SPECIFICATIONS						
Frying Area	Cook Depth	Oil Capacity	Gas Input Rate / Hr	Burner Pressure Nat	Burner Pressure LP	
14 x 14 in (35.6 x 35.6 cm)	3-1/4 - 5 in (8.3 - 12.7cm)	40 - 50 Lbs (18-23 kg)	122,000 BTUs (36 kW) (129 MJ)	4" W.C. (10 mbars / 1 kPa)	10" W.C. (25 mbars / 2.4 kPa)	
FILTER SPECIFICATIONS						
Pan Oil Capacity	Filter Pump Motor	Filter Pump Rated Flow	Filter Media			
93 Lbs (42.2 kg)	1/3 HP 50/60 Hz	8 GPM (30.3 LPM) @ 60 Hz 6.7 GPM (25.4 LPM) @ 50 Hz	YUM! 14 x 22 in (35.6 x 55.9 cm) Paper Envelope			
FRYER SYSTEM SHIPPING INFORMATION (Approximate)						
Shipping Weight	Shipping Crate Size H x W x L			Shipping Cube		
809 Lbs (367 kg)	56 x 50-1/2 x 51 in (142.2 x 128.3 x 129.5 cm)			75 ft ³ . (2.1m ³)		
INSTALLATION INFORMATION						
GAS SYSTEM REQUIREMENTS			ELECTRIC SYSTEM REQUIREMENTS			
	Natural Gas	LP Gas		115V 60Hz	208 / 220-240V 50-60 hz	
Supply Pressure *	7 - 10" W.C. (17.4 mbars/ 1.74 kPa)	11 - 13" W.C. (27.4 mbars/ 2.74 kPa)	Fryer Cord (Total Amps)	2.1	1.2	
Total Gas Load / Hr	366,000 Btu (107kw) (386 MJ)		Filter Cord (Total Amps)	5.4	3.7	
* Check plumbing / gas codes for proper gas supply line sizing to sustain burner pressure when all gas appliances are full on.						
CLEARANCES						
Front min.	Floor min.	Combustible material		Non-Combustible material		Fryer Flue Area
30" (76.2 cm)	6" (15.25 cm)	Sides min.	Rear min.	Sides min.	Rear min.	Do not block / restrict flue gases from flowing into hood or install vent hood drains over the flue.
		6" (15.2cm)	6" (15.2cm)	0"	0"	



Pitco Frialator, Inc • P.O. Box 501, Concord, NH 03302-0501 • 509 Route 3A, Bow, NH 03304

603-225-6684 • FAX: 603-225-8497 • www.pitco.com

L10-206 Rev 3 03/06

Printed in the USA