



**Model AW-SSH55-3
Solstice Supreme Gas Open Fryer
With Filtration**



APPLICATION

The AW-SSH55-3 is for Energy Saving High Production frying. It utilizes Solstice Supreme Burner Technology which provides very dependable atmospheric heat transfer and fuel saving Energy Star™* performance without the need for complex power blowers. It is equipped with a space saving under the fryer filter system. This frying system is ideal for cooking Fries, Onion Rings, Chicken filets, Chicken Strips and other standard YUM freezer to fryer products.



STANDARD FRYER FEATURES

- Fry pot constructed of stainless steel
- Cabinet-stainless steel sides, front, splash back
- **SUPREME** Burner Technology, No blower or ceramics
- Self Cleaning Burner & Down Draft Protection
- I12 Intellifry menu cooking computer
- Matchless pilot ignition system with flame loss safety shut off, dedicated fryer gas shut-off valves
- High temperature limit switch
- Drain valve interlock
- 1 ¼" (3.2 cm) Full port drain valve
- Heavy duty 3/16" (.48 cm) door hinges
- 9" (22.9 cm) swivel adjustable casters, front locking
- Single gas connection -1" (2.54 cm) NPT

ACCESSORY ITEMS SHIPPED WITH UNIT

- 1 - Fry pot drain clean out rod
- 1 - Fry pot cleaning brush
- 1 - Fry pot crumb scoop
- 1 - Filter shovel scoop
- 1 - YUM 14" x 22" (35.6 x 55.9 cm) filter paper envelope starter pack
- 3 - Tube racks
- 3 - Removable tall basket hangers
- 6 - Twin size fry baskets
- 1 - 48" x 1" (122 x 2.54 cm) NPT flexible gas hose

**AW-SSH55-3 (Gas Open Fryer w/Filtration)
SHORT FORM DESCRIPTION**

Solstice Gas Open Fryer AW-SSH55-3 (L10306-Ax, Gas type, Voltage, kBTU/hr, Gas Hose), Line up (L/R) SSH55,filter,SSH55,SSH55 with I12 Intellifry menu computer, matchless ignition, Self Cleaning Burner & Down Draft Protection, drain valve interlock, SS sides & front, 9" casters. Accessories includes: (1) clean out rod, (1) brush, (1) crumb scoop, (1) filter shovel scoop, (1) YUM filter envelope starter pack, (3) tube racks, (3) removable tall basket hangers, (6) twin baskets, (1) 48" x 1" (122 x 2.54 cm) flexible gas hose with 1" (2.54 cm) close nipple. Performance and installation check by a qualified service representative.

Pitco Ref. #:
L10306-A1- NATURAL, 115V, 80kBTu, w/Gas Hose
L10306-A2 -PROPANE, 115V, 80kBTu, w/Gas Hose

STANDARD FILTER FEATURES

- Filter pump thermally and overload protected
- Rear oil return for bottom cleaning
- Extra Large 3" (7.6 cm) curved drain spout virtually eliminates splashing and swivels for oil disposal.
- Filter pan is stainless steel with rear wheels for easy movement during cleaning.
- Connection to fryer is self aligning for hands free operation. Easy two step filtering.
- Filter pan lid. Self storing, out of the way.



Model AW-SSH55-3 Solstice Supreme Gas Open Fryer with Filtration




Pitco Frialator, Inc • P.O. Box 501, Concord, NH 03302-0501 • 553 Route 3A, Bow, NH 03304

603-225-6684 • FAX: 603-225-8497 • www.pitco.com

L10-306 Rev 1 12/15


Printed in the USA

Model AW-SSH55-3 Solstice Supreme Gas Open Fryer with Filtration

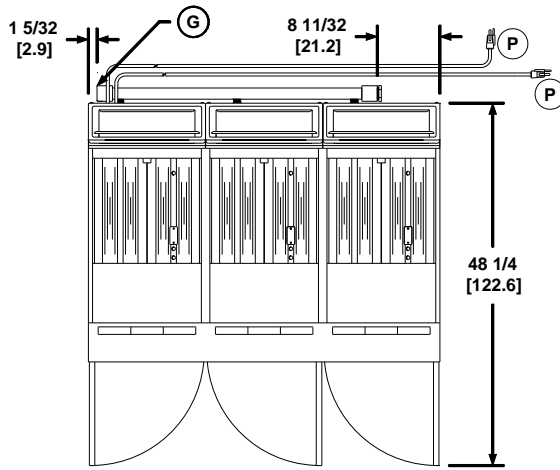

- 1 INCH NPT REAR TEE LEFT CONNECTION
- Ⓒ (FIELD CONVERTIBLE TO RIGHT) (CE 1 INCH BSP ADAPTOR ADDS 3 [7.6] TO CONNECTION)
- Ⓐ 6 FOOT (183 CM) POWER CORD (NEMA 5-15 PLUG 115VAC UNITS ONLY)
- Ⓓ 1-1/4 INCH (3.2CM) NPT FULL PORT DRAIN VALVE

IN (CM)

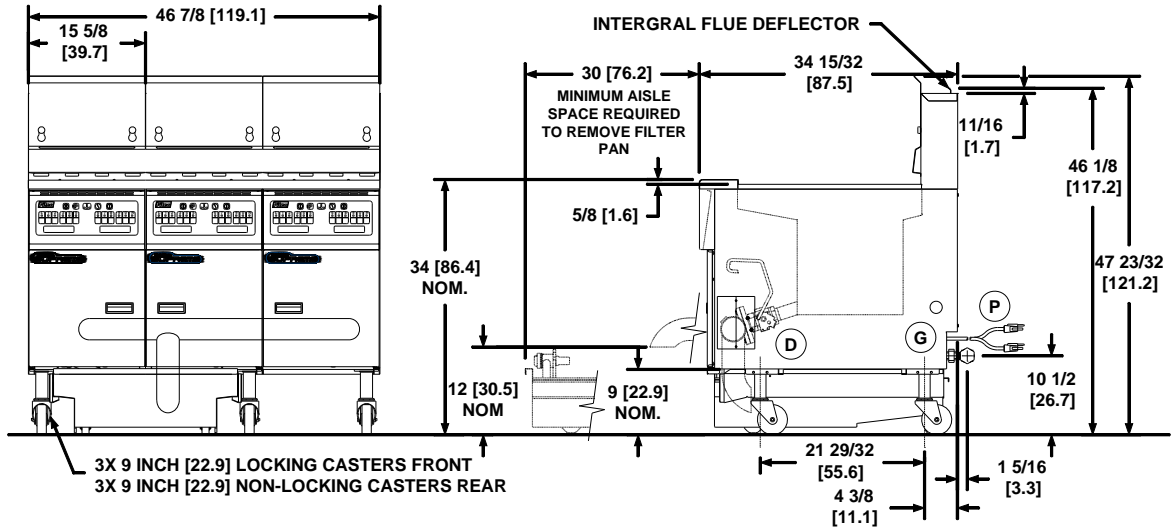

INDIVIDUAL FRYER SPECIFICATIONS						
Frying Area	Cook Depth	Oil Capacity	Gas Input Rate / Hr	Burner Pressure Nat	Burner Pressure LP	
14 x 14 in (35.6 x 35.6 cm)	3-1/4 - 5 in (8.3 - 12.7cm)	40 - 50 Lbs (18-23 kg)	80,000 BTUs (23 kW) (84 MJ)	4" W.C. (10 mbars / 1 kPa)	10" W.C. (25 mbars / 2.4 kPa)	
FILTER SPECIFICATIONS						
Filter Pan Oil Capacity	Filter Pump Motor	Filter Pump Rated Flow	Filter Media			
93 Lbs (42.2 kg)	1/3 HP 50/60 Hz	8 GPM (30.3 LPM) @ 60 Hz 6.7 GPM (25.4 LPM) @ 50 Hz	YUM! 14 x 22 in (35.6 x 55.9 cm) Paper Envelope			
FRYER SYSTEM SHIPPING INFORMATION (Approximate)						
Shipping Weight	Shipping Crate Size H x W x L			Shipping Cube		
885 Lbs (401 kg)	56 x 42 x 51 in (142.2 x 107.8 x 129.5 cm)			69.4 ft ³ . (2.0 m ³)		
INSTALLATION INFORMATION						
GAS SYSTEM REQUIREMENTS			ELECTRIC SYSTEM REQUIREMENTS			
	Natural Gas	LP Gas		115V 60Hz	208 / 220-240V 50-60 hz	
Supply Pressure *	7 - 10" W.C. (17.4 mbars/ 1.74 kPa)	11 - 13" W.C. (27.4 mbars/ 2.74 kPa)	Fryer Cord (Total Amps)	2.1	1.2	
Total Gas Load / Hr	240,000 Btu (70 kw) (253 MJ)		Filter Cord (Total Amps)	5.4	3.7	
* Check plumbing / gas codes for proper gas supply line sizing to sustain burner pressure when all gas appliances are full on.						
CLEARANCES						
Front min.	Floor min.	Combustible material		Non-Combustible material		Fryer Flue Area
30" (76.2 cm)	6" (15.25 cm)	Sides min.	Rear min.	Sides min.	Rear min.	Do not block / restrict flue gases from flowing into hood or install vent hood drains over the flue.
		6" (15.2cm)	6" (15.2cm)	0"	0"	



Pitco Frialator, Inc • P.O. Box 501, Concord, NH 03302-0501 • 553 Route 3A, Bow, NH 03304

603-225-6684 • FAX: 603-225-8497 • www.pitco.com

L10-306 Rev 1 12/15

Printed in the USA